

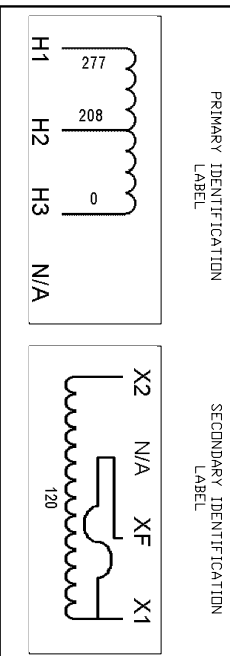


1	REVISION DT- - - - -		UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES ONE PLACE DEC TWO PLACE DEC THREE PLACE DEC ANGLES OCCURRENCE APPROX AMPERAGE FORCE/TORQUE/SPEED TEMPERATURE DIMENSIONS TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994	
	DRP/ITER/DESIGNER S. CASTRO	DATE 07/02/09	DATE 07/02/09	DATE 07/02/09
	E. ROBLES			
	A.P.P.D O SANDOVAL			
	ENGR REF			
	TOOL REF			
	DSP/EC			
	SIZE B	DWG NO C0250E3A.DWG	PRODUCT CODE C0250E3A	
	SCALE	PARTS LIST	SHEET NO 1 OF 1	

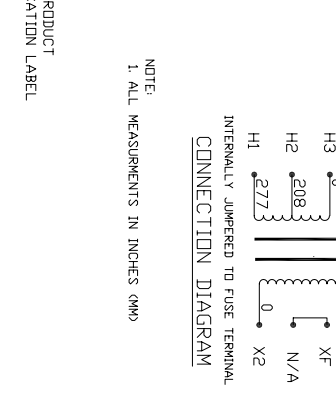


Culter-Hammer
INDUSTRIAL CONTROL TRANSFORMER
250V/VA 50/60Hz
TEMP CL. 130°C
CAT. NO. C0250E3A
SERIES 2
B250-2219-1F

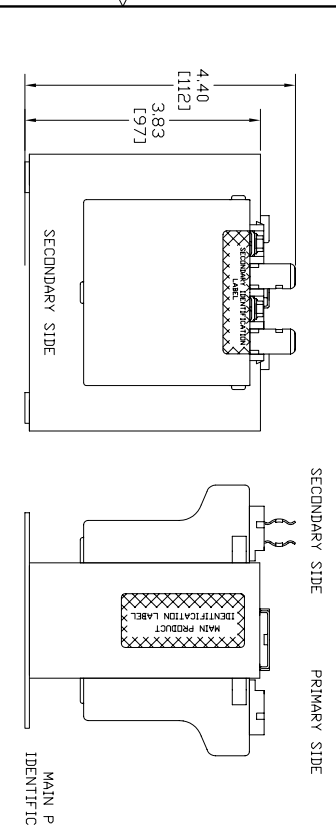

NOTE:
1. ALL MEASUREMENTS IN INCHES (MM)

PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.4 LBS

WINDING	H3-H2-H1	X2-X1
DC VOLTS	208-2-277	120
LEAD VOLTS	208-277	120
FL AMPS	1.489	2.083
HI-TOT	3000V	1800V
EXCITING AMPS	0.42AMPS @ 277 VOLTS, 50HZ	
EXCITING WATTS	1525	

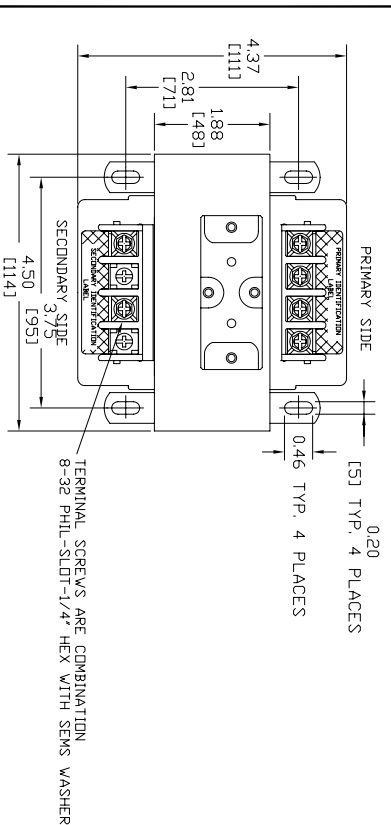

PRIMARY VOLTAGE(S)	208/277
SECONDARY VOLTAGE(S)	120
RATED V.A.	250
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	9.4 LBS

WINDING	H3-H2-H1	X2-X1
DC VOLTS	208-2-277	120
LEAD VOLTS	208-277	120
FL AMPS	1.489	2.083
HI-TOT	3000V	1800V
EXCITING AMPS	0.42AMPS @ 277 VOLTS, 50HZ	
EXCITING WATTS	1525	